


MICRO SWITCH on LOCK INSTALLATION and CONNECTION



ASSEMBLY ON THE LEFT

ASSEMBLY ON THE RIGHT

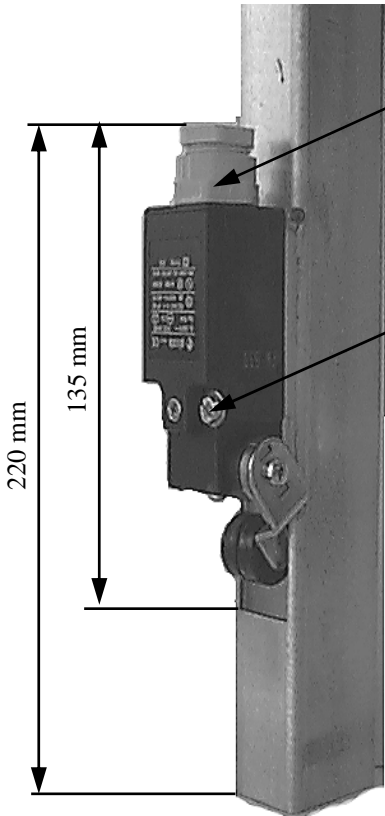


CABLE GLAND

CLAMP SCREW M4 x 30
+ WASHERS Ø 4

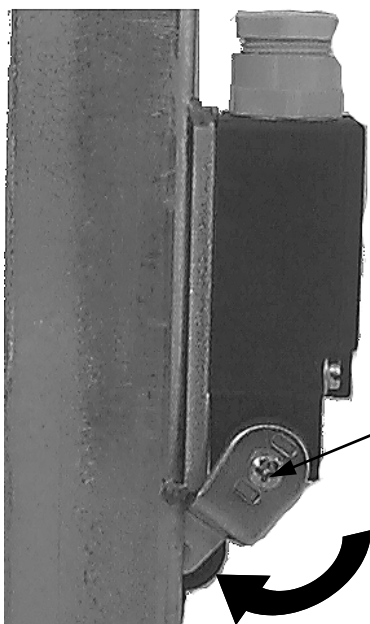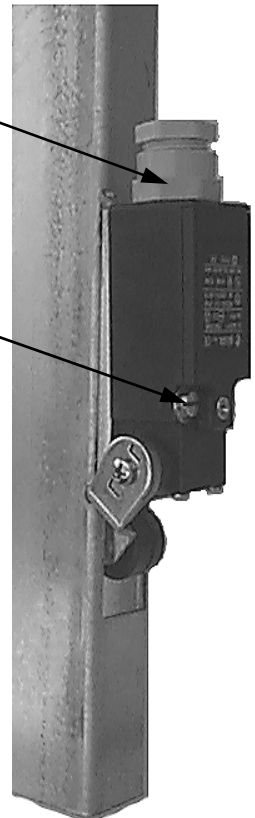

ADJUSTMENT SCREW

TOP VIEW

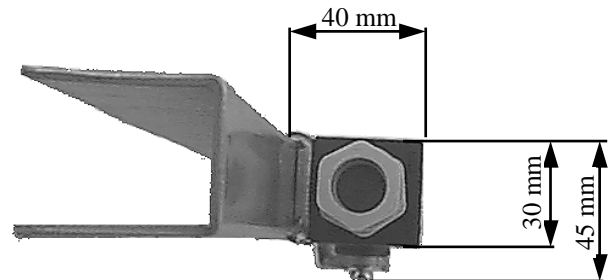


After having loosened the screw, push the roller as far as it will go into the guiding rail and then retighten the screw

CONNECTING the SAFETY MICRO SWITCH

PRINCIPLE : The safety micro switch cuts the current in ascent phase which powers the operator when the lock is closed.

ATTENTION : Voir les notices de branchement de l'alimentation et des boîtiers de commande fournis.

Montage avec une boîte à clé

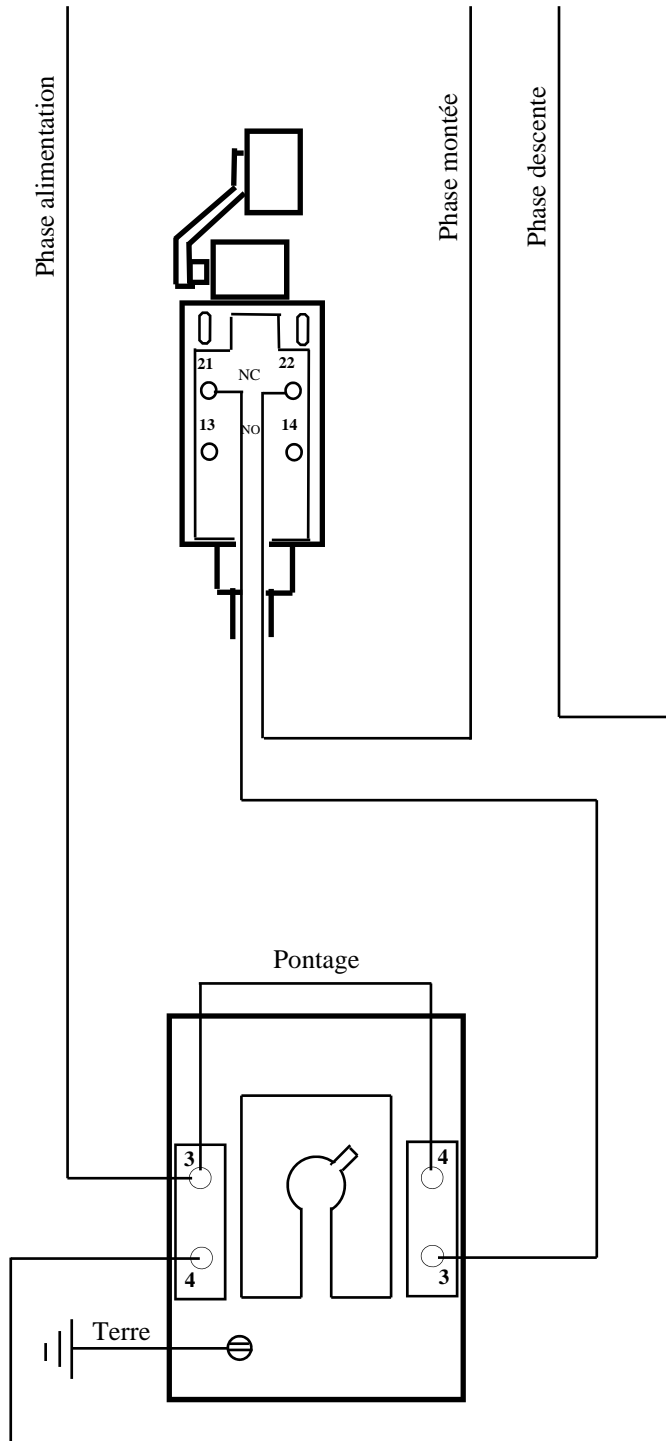

Montage avec un bouton

